


1500 Gal Septic / 1000 Gal Lift Station Tank

46 Gallons / Inch

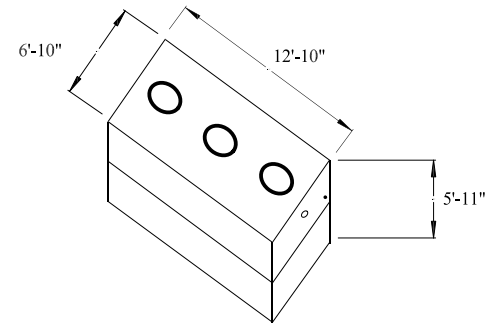

Specifications


Includes:

Pump w/Float Switch
Check Valve
12-2 Electric Wire
Electrical Junction Box

Optional:

High Water Alarm

ASSEMBLED TANK



- Deliveries are with a Pepcon Straight or Swing boom trucks.
- Effluent Filter with 6" c-o is Req'd as noted.

NOTES: 1. Fill over Tank Min is 1'-0" & Max is 2'-0"

08/27/25	B	Correction per ODH
08/21/25	A	See Note Corrected Dimension

DATE	REV.	LOC.	DESCRIPTION
------	------	------	-------------

PEPCON WEST MILTON PRECAST

P. O. BOX 159, WEST MILTON, OH 45383

WEST MILTON PHONE: (937) 698-4181

OHIO WATS PHONE: (800) 762-4066

MODEL: PEPFLOW - SERIES 1

MATERIAL: VIBRATED CONCRETE REINFORCED W/ 6X6" 10/10 WIRE MESH & #3 (3/8") REBAR

SCALE: 3/8" = 1'-0" UNLESS OTHERWISE NOTED

DR. BY: RVA

DATE: 07/25/25

DWG. No: 04-25003C-A01

SHEET 1 OF 1